


WATCHMAN FLX™

LEFT ATRIAL APPENDAGE CLOSURE DEVICE

THE FUTURE OF LAAC

WATCHMAN
FLX

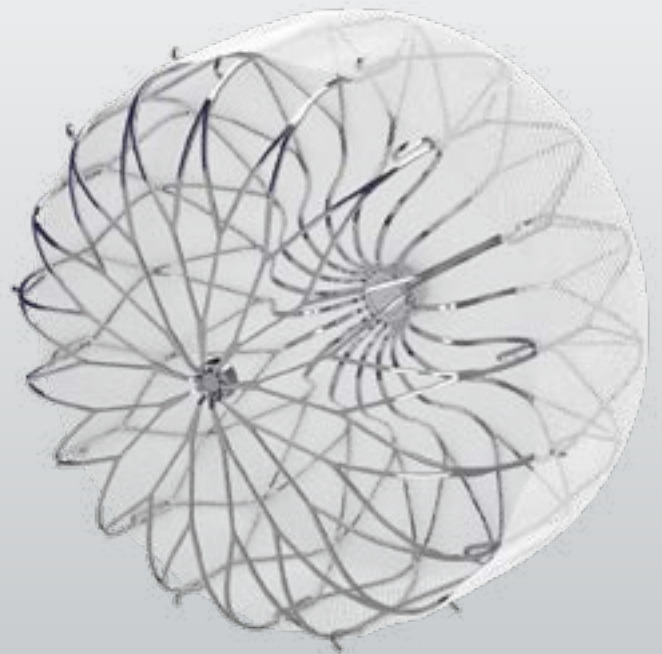

THE FEEL. Full control for an intuitive, safe and precise positioning

THE SEAL. Enhanced conformability for confident closure

THE HEAL. Minimal metal exposure for optimized healing

WATCHMAN FLX™

LEFT ATRIAL APPENDAGE CLOSURE DEVICE

Procedural benefits include

- WATCHMAN FLX™ features a soft, closed, atraumatic distal end to enable advancement within the LAA when partially deployed (forming the "FLX-Ball")
- The distal fluoroscopic marker allows high visibility of the device in relation to the LAA during device positioning
- WATCHMAN FLX can be fully recaptured and repositioned. In a partially deployed state WATCHMAN FLX & TruSeal Access system can be safely advanced in the LAA
- WATCHMAN FLX is preloaded into the delivery catheter, reducing preparation time



Product Information

Description	Specifications
WATCHMAN FLX™	Nitinol frame with Polyethylene Terephthalate (PET) with distal fluoroscopic marker
Delivery Catheter	
Sheath Material	Braided Pebax® with PTFE liner and platinum/iridium marker band
TruSeal™ Access Sheath	
Hub	Material Pebax® with polycarbonate cap
Sheath Material	Pebax® with PTFE liner and platinum/iridium marker band
Dilator	HDPE/LDPE high density polyethylene/low density polyethylene (50:50 blend)

Product List

	Ref/Catalog number	Description	Size	Order Number (GTIN)	ID	OD
WATCHMAN FLX™ LAAC DEVICE	M635WS50200	WATCHMAN FLX™ LAAC Device and Delivery System	20 mm	08714729860433	–	12F (4.0 mm)
	M635WS50240	WATCHMAN FLX™ LAAC Device and Delivery System	24 mm	08714729860440	–	12F (4.0 mm)
	M635WS50270	WATCHMAN FLX™ LAAC Device and Delivery System	27 mm	08714729860457	–	12F (4.0 mm)
	M635WS50310	WATCHMAN FLX™ LAAC Device and Delivery System	31 mm	08714729860464	–	12F (4.0 mm)
	M635WS50350	WATCHMAN FLX™ LAAC Device and Delivery System	35 mm	08714729860471	–	12F (4.0 mm)
	Ref/Catalog number	Description	Curve		ID	OD
WATCHMAN™ TruSeal™ Access Sheath	M635TS70010	WATCHMAN™ TruSeal™ Access System	Single	08714729965732	12F (4.2 mm)	14F (4.8 mm)
	M635TS70020	WATCHMAN™ TruSeal™ Access System	Double	08714729965749	12F (4.2 mm)	14F (4.8 mm)
	M635TS70040	WATCHMAN™ TruSeal™ Access System	Anterior	08714729965756	12F (4.2 mm)	14F (4.8 mm)

Magnetic Resonance Imaging

Non-clinical testing has demonstrated the WATCHMAN FLX Device is MR Conditional. A patient with the Closure Device can be scanned safely, immediately after placement of this implant, under the following conditions:

- Static magnetic fields of 3.0 Tesla or 1.5 Tesla
- Spatial gradient field of 2500 Gauss/cm or less
- Spatial gradient field product of 37 T2/m or less
- The maximum whole body averaged specific absorption rate (SAR) shall be limited to 2.0 W/kg (normal operating mode only) for 15 minutes of continuous application of RF energy during a scan
- Normal operating mode of the MRI scanner

Boston Scientific
Advancing science for life™

All cited trademarks are the property of their respective owners. CAUTION: The law restricts these devices to sale by or on the order of a physician. Indications, contraindications, warnings and instructions for use can be found in the product labelling supplied with each device. Information for the use only in countries with applicable health authority product registrations. Materials not intended for use in France.

SH-622903-AA Printed in Germany by medicalvision.

www.bostonscientific.eu

© 2019 Boston Scientific Corporation or its affiliates. All rights reserved. DINSH0219EA